

SS-120CNL-E260*	90-305Vac	120W	180-260V	200-260V	0.4-0.6A	8%	0.97	94.5%	90

	180V		260V	
	200V		260V	
	0.46A		0.6A	
	0.4A		0.6A	
			310V	

SS-120CNL-E (62) Series LED Driver

Other Characteristics:

0-10V Dimming (Optional)	Dim Vmax	0V		12V	
	Dim Range	10%Iomax		100%Ioset	
	Rec.Dim Range	0V		10V	
PWM Dimming (Optional)	PWM High	9.8V		10.2V	
	PWM Low	0V		0.3V	
	Frequency	1KHz		2KHz	
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	
	Dim Range	10%Iomax		100%Ioset	


SS-120CNL-E (62) Ser

Performance Curves

Output Voltage Vs. Ou



Effici t Voltage (Vin=120Vac)

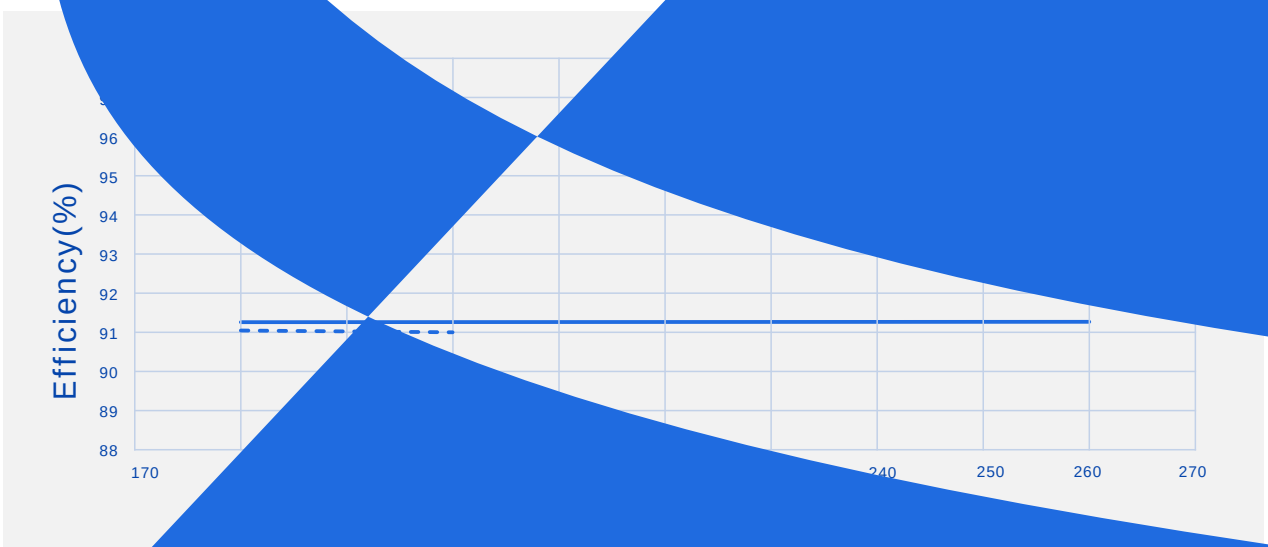

Performance Curves:

Efficiency Vs. Output Voltage (Vin=220Vac)

SHENZHEN SOSEN
ELECTRONICS CO.,LTD

86-755-29358800 86-755-29358816

Performance Curves:


Output power Vs. Input Voltage

Output power Vs. Case Temperature

Output Power Vs. Dimming

Lifetime Vs. Case Temperature

SS-120CNL-E (62) Series LED Driver

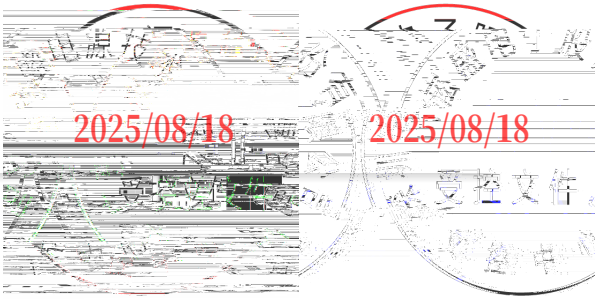
2025/08/18
2025/08/18